

PLATINUM SMART-HEAT™ ELECTRIC

Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces. This slim-line, stainless steel unit spreads comfort evenly in its space, all while minimising light emission and blending seamlessly into the background with our recess mounting solutions.



2300W SERIES
BLACK | WHITE



3400W SERIES
BLACK | WHITE

SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.

MODEL NUMBER	2300W SERIES	3400W SERIES
PRODUCT CODES PLATINUM ELECTRIC	2620240 2620247	2620245 2620248
PRODUCT CODES PLATINUM ELECTRIC MARINE	2620251 2620253	2620252 2620254
FUEL TYPE	ELECTRIC	ELECTRIC
COLOUR	BLACK WHITE	BLACK WHITE
HEAT AREA	6M ²	10M ²
RATED CURRENT	220 - 240V/9.6A	220 - 240V/14.2A
MINIMUM FLOOR CLEARANCE	WALL 1800MM CEILING 2400MM	

MOUNTING OPTIONS

CEILING MOUNT	✓	✓
CEILING RECESS KIT PRODUCT CODES	2620241	2620246
WALL MOUNT	✓	✓
RECESSED FLUSH MOUNT	✓	✓
CEILING POLE MOUNT	✓	✓
CEILING POLE 600MM PRODUCT CODE	2620243	2620243
CEILING POLE 1200MM PRODUCT CODE	2620244	2620244
FREESTANDING	-	-

CONTROL OPTIONS

ON OFF	✓	✓
ON OFF PRODUCT CODE	2620275	2620275
DIMMER	✓	✓
DIMMER PRODUCT CODE	2620276	2620276
MASTER REMOTE *	✓	✓


* Controls up to six zones of heaters with unlimited heaters per zone from a single remote control. Dimmer controller required. Control operates within 30m of heaters.

Measurements displayed within this document are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in mm.

DIMENSIONS


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

PROFILE

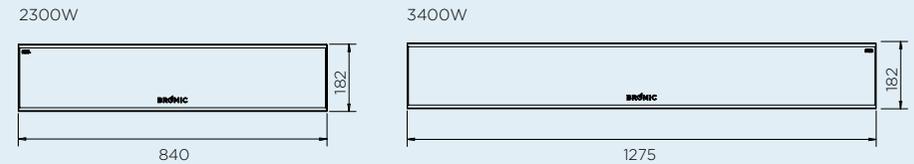


CEILING RECESS



CEILING RECESS FRAME 2300W

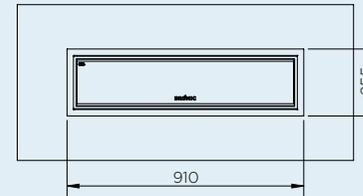

CEILING RECESS FRAME 3400W

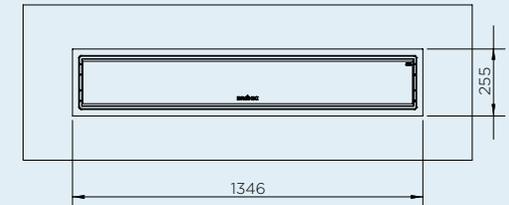

MINIMUM CAVITY SIZE FOR BOTH 2300W & 3400W MODELS

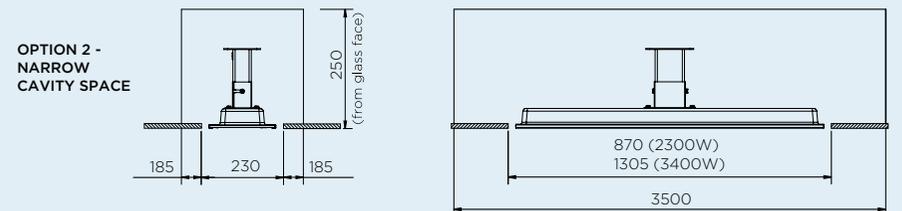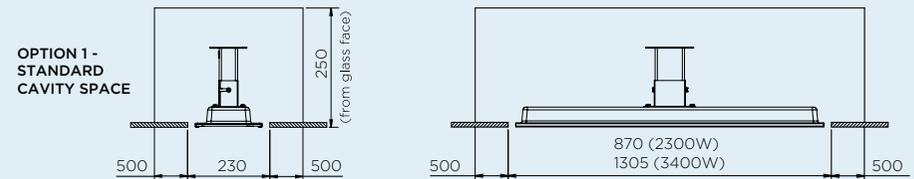


MOUNT OPTIONS


With a wide array of mounting options, Bromic offers solutions to compliment any décor and provide functionality for ambiance and comfort.

CEILING & WALL MOUNT


CEILING MOUNT CLEARANCE

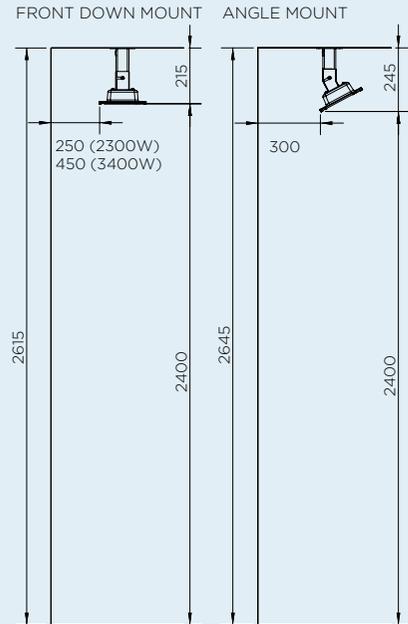


CEILING POLE CLEARANCE

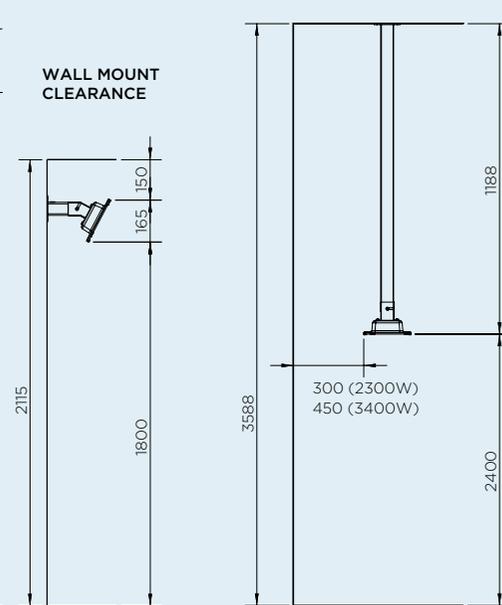


WALL MOUNT CLEARANCE

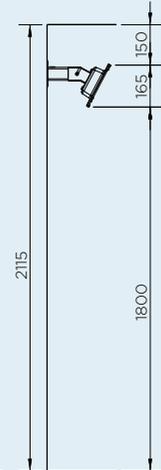

WALL BRACKET (INCLUDED)



CEILING BRACKET (INCLUDED)




HEATING REACH

Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.

HEAT AREAS

2300W SERIES
HEATING APPROXIMATELY 6M²
2300W HEATING POWER

3400W SERIES
HEATING APPROXIMATELY 10M²
3400W HEATING POWER

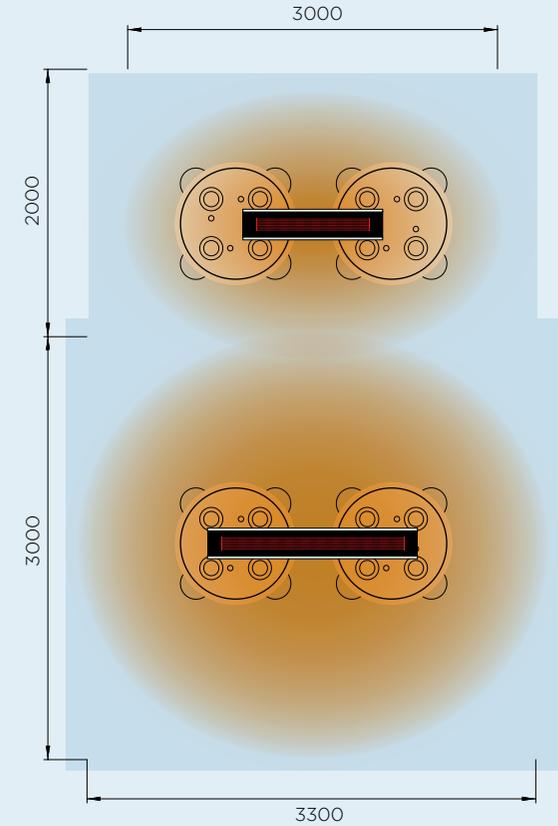

CONTROL OPTIONS



ON | OFF CONTROL



DIMMER CONTROL



MASTER REMOTE



REDEFINE THE BOUNDARIES
OF YOUR SPACE, BY INCLUDING
THE OUTDOORS. CONTROL THE
CLIMATE IN YOUR NEXT PROJECT
WITH BROMIC SMART-HEAT™.



**VERSATILE
MOUNTING SOLUTION**
Minimal vertical clearance

HIGH PERFORMANCE CONSTRUCTION
304 stainless steel & tinted ceramic screen

**CLEAN, COMPACT AND
ELEGANT DESIGN**
For seamless integration



**COMPATIBLE WITH
SMART-WIRELESS
TECHNOLOGY**

**ADJUSTABLE MOUNTING
BRACKETS**
Allows for directional
heat distribution

BROMIC.COM

ASIA PACIFIC | NORTH AMERICA | EUROPE

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.